

# NO CHIMNEY REQUIRED

# G9



Enjoy beauty and warmth from your fireplace with the most efficient, reliable and clean-burning gas log set!



**GOLDEN OAK DESIGNER**



**SPLIT OAK SEE-THRU**

**Real-Fyre  
Gas Logs**

**Just like a real fire, only better.  
Warming Homes for over 50 years**

### **Beautiful and Realistic**

Yellow dancing flames and dramatic glowing embers, enhanced by a precisely engineered reflective panel, give the illusion of a wood fire. Finely detailed logs with deep bark texture and hand-painted colour highlights add to the realistic effect of these Gas Log Sets

### **Efficient and Reliable**

A full natural flame that uses a minimum of gas offers money-saving fuel efficiency. All sets are rated at maximum 36,000 BTU. You burn them with the damper closed putting all the heat into your room. No electricity is needed for reliable supplementary heating.

### **Clean Burning and Safe**

This is the cleanest burning loose ember vent-free Log Set on the market! No soot or ashes to worry about. This set includes an Oxygen Depletion Sensor (ODS) for safe vent-free operation and is certified by the LP Gas Association of South Africa and designed to the highest international CSA Safety standards.

Set includes 7 individually handcrafted logs, wood-style grate, factory installed controls, an Oxygen Depletion Sensor (ODS), glowing embers, lava granules and connector kit. For use in solid-fuel burning fireplaces, certain universal vent-free fireplaces and approved vent-free fireplaces. Available in 610mm for LP or natural\* gas  
**Must be installed by a qualified installation professional.**



CSA DESIGN CERTIFIED



SAFE APPLIANCE


**MASTER FIRES SA**

phone 021 783 0219 fax 021 783 0236 e-mail info@masterfires.co.za  
Unit 30, Heron Park Kommetjie 7975. P O Box 48298 Kommetjie 7976.

G9-24 MANUAL BURNER				
	Minimum Fireplace Dimensions	Recommended Fireplace Dimensions	Brickwork Dimensions to Accommodate Steel Firebox	Freestanding Fireplace Dimensions
Log Set Size	610mm	610mm	610mm	610mm
Width - Front	737mm	750mm	800mm	755mm
Width - Rear	510mm			
Depth	356mm	375mm	430mm	435mm
Height	483mm	510mm	745mm (Raised off floor) 770mm (Flush with floor)	855mm
	Low		High	
BTU Rating/ Kw	17 000 / 4.98kw		36 000 / 10.55kw	
Consumption g/h	370 g/h		675 g/h	
Minimum Room Size	55m <sup>3</sup>			

G9-2-24 SEE-THRU (DOUBLE SIDED)		
	Minimum Fireplace Dimensions	Recommended Fireplace Dimensions
Log Set Size	610mm	610mm
Width	712mm	740mm
Depth	458mm	485mm
Height	432mm	460mm
	Low	High
BTU Rating/ Kw	19 000 / 7.62kw	39 000 / 11.43kw
Consumption g/h	551 g/h	827 g/h
Minimum Room Size	56m <sup>3</sup>	

## fireplace dimensions indicator

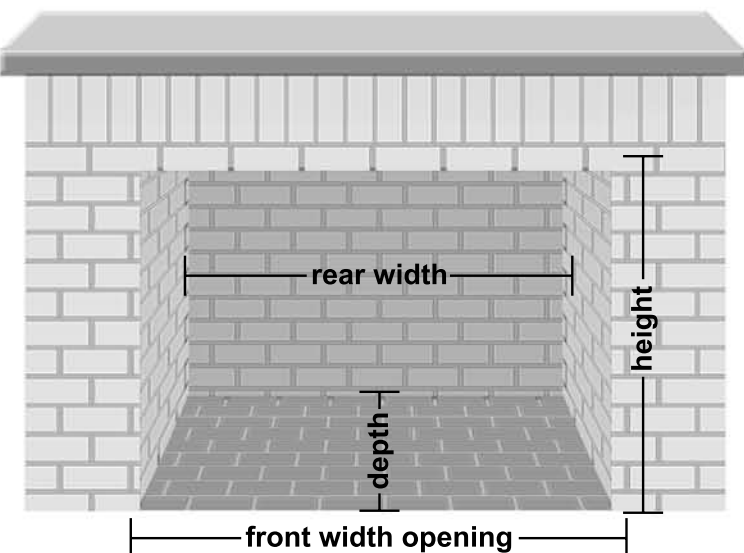

### \*Please note

1. All natural Gas Log Sets on special order

**Safe appliance verification permit number:**  
1105/01/RSA-03/A and 1105/04/RSA-03/A

## PRODUCT WARRANTY

All Real-Fyre® Vent Free Refractory Ceramic Gas Logs are covered by a lifetime warranty

All Real-Fyre® Vent Free burner component parts, except the ember bed, valves, pilots, and controls are covered by a ten (10) year warranty

All Real-Fyre® valves, pilots and controls are covered by a one (1) year warranty

## CERTIFICATION TEST RESULTS:

All Real-Fyre® Vent Free Gas Log sets offered by Master Fires SA have been certified by the LP Gas Safety Association of South Africa in accordance with SANS 1539:2003 "Appliances operating on liquefied petroleum – Safety Aspects"

Test Report Number: 05/0034/A4 (a)

The results from the tests conducted on the Real-Fyre® Vent Free fireplace for the CO: CO<sub>2</sub> mass ratio reflected a CO: CO<sub>2</sub> mass ratio of 0.0035, which is well below the permissible concentrations of 0.02 as stipulated by SANS1539: 2003